


In re Appln. of WALTHER et al.  
Application No.

### REMARKS

Applicants have cancelled claims 1-12, without prejudice, and added new claims 13-25 in order to bring the claims into conformity with standard U.S. practice. In addition, applicants are submitting herewith a replacement specification that addresses various usage issues resulting from the translation from the original German language application. No new matter has been introduced by way of the replacement specification.

The application is considered in good and proper form for allowance, and the Examiner is respectfully requested to pass this application to issue. If, in the opinion of the Examiner, a telephone conference would expedite the prosecution of the subject application, the Examiner is invited to call the undersigned attorney.

Respectfully submitted,

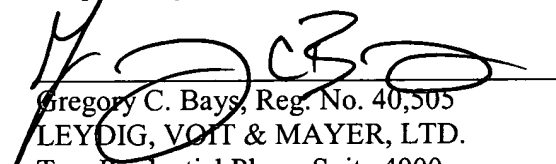

Gregory C. Bays, Reg. No. 40,505  
LEYDIG, VOIT & MAYER, LTD.  
Two Prudential Plaza, Suite 4900  
180 North Stetson Avenue  
Chicago, Illinois 60601-6780  
(312) 616-5600 (telephone)  
(312) 616-5700 (facsimile)

Date: December 10, 2004

Amendment - Preliminary (Revised 11-23-04)

DT05 Rec'd PCT/PTO 10 DEC 2004

LVM 231511

Redlined Specification

1

{APPLICATOR DEVICE FOR A PRINTING/VARNISHING UNIT

IN A PROCESSING MACHINE

Description

FIELD OF THE INVENTION

**[0001]** The invention pertains to an applicator device for a printing/varnishing unit in a processing machine and more particularly in ~~according to the preamble of Claim 1. The processing machine is preferably~~ a printing machine with printing units that is ~~and is preferably~~ combined with at least one varnishing unit or a varnishing machine with at least one varnishing unit.

~~Prior art~~ BACKGROUND OF THE INVENTION

**[0002]** An applicator unit for a printing/varnishing unit of this type is disclosed in known ~~from EP-0 090 179 B1 for preventing that prevents~~ roller marks (in the printed result) in a roller unit of a printing machine. Such roller marks result, for example, from jolts that arise in the rotation of the rollers with a plate cylinder having at least one cylinder channel. In order to guarantee an optimally uniform compressive strain between the plate cylinder and an associated applicator roller, the applicator roller is seated by way of spring-loaded pressure members against an adjacent upstream roller. and s ~~Spring-loaded pressure members are also assigned provided for to this upstream roller.~~ The spring forces of all the pressure members are designed such that the bearing play for the applicator roller is shifted to the side facing away from the upstream roller and for the upstream roller to the side facing away from the applicator roller. The disadvantages herewith this arrangement are the relatively high apparatus-expense component costs and the insufficient damping behavior at higher machine speeds and/or larger format widths of the material to be printed.

**[0003]** ~~From DE 93 10 713.7 U1, discloses~~ an ink-applicator roller ~~is known~~ that is functionally operatively connected to a printing cylinder with a tension channel, and that rolls over the printing cylinder with high damping and in a nearly shock-free manner. To this end, ~~this~~ the roller bears an elastic roller coating as an ink-carrying cover layer on a core. ~~In its contour, The contour of the roller core has a cutback (recess) associated with the tension channel of the printing cylinder, said The cutback being filled by a thickened part of the roller coating.~~ The ink-applicator roller in this case has a completely cylindrical outer surface. The high manufacturing expense costs and the fact that the thickened part of the roller coating must always run synchronously with the tension channel are ~~disadvantageous here~~ disadvantages of this

arrangement. Moreover, the ~~attainable~~achievable damping behavior is insufficient at higher machine speeds and/or larger format widths of the material to be printed.

~~Problem of the invention~~ BRIEF SUMMARY OF THE INVENTION

**[0004]** ~~The invention is based on the problem of~~ In view of the foregoing, an object of the invention is creating an applicator device ~~of the type mentioned initially which~~ that avoids the above-cited disadvantages, ~~and~~ which reduces the occurrence of jolts from the passing of a cylinder channel, ~~in particular,~~ and further increases the print quality.

**[0005]** ~~The problem is solved by the construction characteristics of Claim 1. Refinements can be deduced from the subordinate claims.~~

**[0006]** A first advantage of the invention is based on the fact that the applicator device ~~with~~includes at least one applicator roller ~~and substantially dampens~~ has a markedly damping behavior against jolts resulting ~~form~~ from the passage of a cylinder channel. By virtue of the construction of the applicator device, no shocks, or ~~barely~~very negligible ~~small~~ shocks, are transferred into the adjacent roller groups or cylinders. Moreover, the formation of roller strips on the printed product is ~~avoidable~~avoided, and thus an increase in the printing quality (or varnishing quality) can be realized.

**[0007]** It is also advantageous that the applicator device with at least one applicator roller ~~permit~~of the invention permits the operation of a processing machine to be operated at increased ~~maximum machine speed~~high speeds, particularly for large formats of material to be printed, without any shocks.

**[0008]** An additional advantage of the invention is that the applicator device with at least one applicator roller can be used universally on processing machines with at least one printing roller and at least one cylinder channel. The applicator device ~~can~~ preferably can be used on inking units, especially offset and/or flexographic inking units. In offset printing assisted by moistening agents, the applicator device also ~~can also~~ be used in moistening units. The applicator device also ~~can also~~ be used in varnishing and flexographic printing units. In that case, the applicator device is always ~~functionally~~operatively connected to a printing cylinder or a plate cylinder with preferably at least one cylinder channel.

**[0009]** It is also advantageous that the applicator device with at least one applicator roller of the invention can be driven, preferably in the inking unit and/or moistening unit, at a speed differing from that of the printing cylinder. ~~Here~~In such a case, the applicator roller can be driven ~~nonpositively~~in a nonpositive manner by the printing cylinder, and the adjacent roller, ~~e.g.~~ e.g. the friction roller, ~~for instance,~~ can be driven positively in a positive manner.

[0010] Finally, it is advantageous that at least one applicator roller of the applicator device of the invention can comprise a layer that is compressible over the entire periphery of the roller while rolling. In this particular case, the applicator roller can comprise ~~comprises~~ a roller core on which the compressible layer is concentrically arranged adhesively, and a cover layer bearing the material to be processed (ink, varnish, moistening agent) that is concentrically arranged adhesively on ~~this~~ the compressible layer.

[0011] ~~In~~ With the passage of a cylinder channel, ~~the thus constructed~~ an applicator roller having such a construction dips into the latter and into the channel edges. ~~Finally, especially,~~ The compressible layer of the applicator roller has a sufficient restoring force so that, after the passage of the cylinder channel, including the channel start, the basic roller position, particularly the predetermined roller strip (roller placement) can again be assumed on the adjacent printing cylinder.

[0012] The compressible layer of the applicator roller ~~consists~~ can consist of a foamed material with a cellular structure. The pore diameter of a cell preferably ~~amounts to~~ is approximately 0.1-5 mm. The structure can be closed-cell, i.e., the individual cells form closed cavities, or open-cell, i.e., the cells are connected to one another, ~~in form~~. Alternatively, a foamed material with mixed-cell structure can be used.

#### DESCRIPTION OF THE DRAWINGS

##### [0013] Examples

———— The invention will be explained further on the basis of an embodiment example.

———— Shown schematically are:

———— Figure 1, an offset printing unit;

———— Figure 2, a varnishing unit;

[0013] ~~Figure 3, an applicator roller of the applicator unit in cross section.~~ Figure 1 is a schematic diagram of an exemplary offset printing unit including an applicator roller in accordance with the invention.

[0014] Figure 2 is a schematic diagram of an exemplary varnishing unit including an applicator roller in accordance with the invention.

[0015] Figure 3 is a cross-sectional view of an exemplary applicator roller according to the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

~~[0014]~~ [0016] According to Figure 1, an offset printing unit with an inking unit 3 and, as desired, a moistening unit 4 is shown. Among other components ~~items~~, the inking unit 3

comprises at least one roller train having at its end several applicator rollers as comprising ink-applicator rollers 6. Upstream of the ink-applicator rollers 6 are axially ~~changeable~~ moveable and rotationally drivable friction rollers 8.

~~[0015]~~[0017] In the ~~present example~~ illustrated embodiment, four ink-applicator rollers 6 are in frictional contact with the periphery of a printing cylinder 1 ~~on the periphery of this printing cylinder 1~~, constructed in this case ~~here~~ as a plate cylinder. The first and second ink-applicator ~~roller~~ rollers 6 in the direction of rotation of the printing cylinder 1 are jointly in frictional contact with an upstream first friction roller 8 and the third and fourth application rollers 6 are jointly in frictional contact with an upstream second friction roller 8.

~~[0016]~~[0018] The ~~p~~Printing cylinder 1 has at least one cylinder channel 10 arranged parallel to its axis, for receiving, for instance, a tensioning means ~~mechanism~~ for the fixation of printing forms. The printing cylinder 1 is additionally in contact with a rubber blanket cylinder 2 and the rubber blanket cylinder 2 is in contact with a pressure cylinder, (not shown), such as a sheet-guidance cylinder, which guides the material to be printed.

~~[0017]~~[0019] As needed in, for instance, moistening agent-assisted offset printing, a moistening unit 4 is situated upstream of the inking unit 3 in the direction of rotation of the printing cylinder 1. The mMoistening unit 4 has at least one applicator roller as comprising a moisture-applicator roller 5 that can be brought into contact with the printing cylinder 1 and which is functionally operatively connected to a moistening agent metering system.

~~[0018]~~[0020] ~~According to~~ In Figure 2, a varnishing unit, or, alternatively, a flexographic printing unit is shown, having a printing cylinder 1 with at least one cylinder channel 10 and a pressure cylinder 11, such as a sheet-guidance cylinder, that is functionally operatively connected to the printing cylinder 1.

~~[0019]~~[0021] The printing unit illustrated in Figure 2 comprises at least one applicator roller that can be brought into contact with printing cylinder 1; it serves as a varnish-applicator roller 7, which is coupled with a metering system 9 for the medium to be processed (flexographic ink, varnish), for instance, a doctor-blade or roller system.

~~[0020]~~[0022] In Figure 3, an applicator roller ~~5, 6, 7~~ (which can be the moisture-applicator roller 5 of Fig. 1, the ink-applicator roller 6 of Fig. 1, or the varnish-applicator roller 7 of Fig. 2) is shown in cross section. This applicator roller 5, 6, 7 possesses a roller core 12 (with roller journals arranged at its ends) as support material.

~~[0022]~~[0023] ~~On roller core 12, a~~ A compressible layer 13 is tightly adhered concentrically on the roller core 12; ~~on it, in turn, a cover layer 14 carrying the actual medium (ink, varnish, moistening agent) is tightly adhered concentrically on the compressible layer 13.~~ ~~[0022]~~

~~[0024]~~The cCompressible layer 13 is preferably has an open-cell or closed-cell construction.

~~a~~Alternatively, a mixed-cell, foamed material can be used. Moreover, compressible layer 13 can be designed to have bubble-shaped or channel-shaped air or gas inclusions.

~~[0023]~~~~[0024]~~ The ~~c~~Cover layer 14 consists of an elastomeric material, preferably a rubber material carrying ink, varnish or moistening agent.

~~[0025]~~ The ~~c~~Compressible material 13 that is formed from a cellular foamed material can be ~~is arranged~~ firmly adhered to roller core 12, preferably by means of a first vulcanization. For example, sponge rubber can be employed as such a foamed material. The ~~f~~Flexible cover layer 14 arranged concentrically on the compressible layer 13 ~~is~~ can then be firmly adhered to this layer 13, preferably by means of a second vulcanization. ~~In~~ With the preferred vulcanizations of the foamed material (layer 13) to the roller core 12, and of the cover layer 14 on the foamed material (layer 13), cross-linking reactions occur, so that the tightly adhesive arrangements are formed in each case by an infinitely large network of molecules.

~~[0026]~~ The ~~c~~Cover layer 14 is preferably an elastic rubber material with wetting properties that are customary for ink, moistening agent or varnish rollers. The cCover layer 14 is preferably an elastic rubber material with a [hardness]-qualityhardness of roughly 20-40 Shore A.

~~[0027]~~ The layer structure of the applicator roller 5, 6, 7 can be configured such that, in a ~~refinement~~ further embodiment, at least one ply of a fabric or a plastic, such as a film, is ~~additionally arranged~~ can also be firmly adhered between the compressible layer 13 and the cover layer 14 and/or between the compressible layer 13 and the roller core 12. Preferably, the ply between roller core 12 and compressible layer 13 is a concentrically arranged barrier layer 15 of, for instance, a rubber material.

~~[0028]~~ In another embodiment, the applicator roller 5, 6, 7 ~~is~~ can be constructed as a casing and can be pulled on and off the roller core 12 as a sleeve (~~not shown~~). The casing is preferably constructed of metal or plastic. The cCompressible layer 13 and the cover layer 14 are each in turn arranged concentrically, firmly adhered in concentric relation to the sleeve.

~~[0029]~~ ~~In a refinement~~ According to a further embodiment of the invention, at least one ply of a fabric or plastic material such as a film is ~~additionally arranged~~ also firmly adhered between the sleeve and compressible layer 13 and/or between the compressible layer 13 and the cover layer 14.

~~[0030]~~ Preferably ~~the ply~~ a ply arranged between the roller core 12 and the compressible layer 13 is a concentrically arranged barrier layer 15 of, for instance, a rubber material.

~~[0031]~~ The bBarrier layer 15 serves preferably serves as an adhesive layer for a better joining ~~that improves the joining of the compressible layer 13 to the roller core 12 or to the sleeve.~~ Additionally, the uniform arrangement of the air or gas inclusions in the foam material inside the compressible layer 13 is supported.

**[0032]** ~~The arrangement of~~ When the applicator roller is embodied as an ink-applicator roller ~~56~~ in the inking unit 3 such as shown in Figure 1 the arrangement is such that at least one of the four ink-applicator rollers 5 is constructed with a compressible layer 13 and the remaining ink-applicator rollers are constructed without a compressible layer 13. ~~In Figure 1, All four ink-applicator rollers of the Figure 1 arrangement preferably comprise the compressible layer 13,~~ which noticeably increases the damping effect.

**[0033]** In another embodiment, at least the first and second (alternatively, the third and fourth) ink-applicator rollers ~~56~~ associated with the joint friction roller 8 are constructed with a compressible layer 13 and a cover layer 14 arranged firmly adhered thereon.

**[0034]** The applicator roller construction of the invention is not limited to an ink-applicator roller 6 ~~is not limited to of an inking unit 3.~~ In another construction embodiment, a moistening-applicator roller 5 of a moistening unit 4 such as shown in Figure 1 is constructed with a roller core 12 and a compressible layer 13 arranged concentrically and firmly adhered thereto, as well as an elastic cover layer 14 arranged firmly adhered to this layer the compressible layer 13.

**[0035]** For printing units with inking and moistening units 3, 4, a combination of moisture-applicator rollers 5 and ink-applicator rollers 6 with having this compressible layer structure, composed of a roller core 12, a compressible layer 13 and an elastic cover layer 14, can be configured provided for each printing unit.

**[0036]** For varnishing units, a varnish-applicator roller 7 such as shown in Figure 2 can be configured with this compressible layer structure, formed of a roller core 12, a compressible layer 13 and an elastic cover layer 14. A metering system 9 can also be arranged before the also precedes varnish-applicator roller 7. The metering system 9 is preferably formed by comprises a screen roller in contact with the varnish-applicator roller 7 and a chamber doctor blade connected to the screen roller.

**[0037]** Alternatively, the varnish-applicator roller 7 is can be part of a pinch-roller or scoop-roller system.

**[0038]** ~~The functioning is as follows:~~ The operation of a processing machine incorporating the invention is as follows:

When the processing machine is in operation, the printing cylinder 1 rotates in the direction of rotation (direction of the arrow in Figure 1) so that at least one of the applicator rollers 5, 6, 7 rolls over the printing cylinder 1. When the cylinder channel 10 passes the point of contact with at least one of the applicator rollers 5, 6, 7, the jolt initiated by the edge of the cylinder channel is almost completely compensated as a result of the layer structure, particularly compressible layer 13, of the applicator roller 5, 6, 7.

~~List of reference numbers~~ List of Reference Numbers

- |    |                                    |
|----|------------------------------------|
| 1  | Printing cylinder (plate cylinder) |
| 2  | Rubber blanket cylinder            |
| 3  | Inking unit                        |
| 4  | Moistening unit                    |
| 5  | Moisture-applicator roller         |
| 6  | Ink-applicator roller              |
| 7  | Varnish-applicator roller          |
| 8  | Friction roller                    |
| 9  | Metering system                    |
| 10 | Cylinder channel                   |
| 11 | Pressure cylinder                  |
| 12 | Roller core                        |
| 13 | Compressible layer                 |
| 14 | Cover layer                        |
| 15 | Barrier layer                      |



Claims WHAT IS CLAIMED IS:

1. Applicator device for a printing/varnishing unit in a processing machine with a printing cylinder with at least one cylinder channel and at least one applicator roller associated with the printing cylinder, characterized in that applicator roller (5, 6, 7) comprises a roller core (12), in that a compressible layer (13) of a cellular foamed material is arranged concentrically and firmly adhered onto roller core (12) and in that an elastic cover layer (14) carrying the medium to be processed is arranged firmly adhered onto compressible layer (13).
2. Applicator roller according to Claim 1, characterized in that applicator roller (5, 6, 7) is a moisture-applicator roller (5) in contact with printing cylinder (1).
3. Applicator roller according to Claim 1, characterized in that applicator roller (5, 6, 7) is at least one ink-applicator roller (6) in contact with printing cylinder (1).
4. Applicator roller according to Claim 1 and 3, characterized in that several ink-applicator rollers (6) are associated with printing cylinder (1) and in that at least the first and second applicator rollers (6) in the direction of rotation of printing cylinder (1) are in contact with a friction roller (8).
5. Applicator roller according to Claim 1, characterized in that applicator roller (5, 6, 7) is a varnish-applicator roller (7) in contact with printing cylinder (1).
6. Applicator roller according to Claim 1, characterized in that compressible layer (13) of applicator roller (5, 6, 7) is an open-pore foamed material.
7. Applicator roller according to Claim 1, characterized in that compressible layer (13) of applicator roller (5, 6, 7) is a closed-pore foamed material.
8. Applicator roller according to Claim 1, characterized in that compressible layer (13) of applicator roller (5, 6, 7) comprises a combination of open-pore and closed-pore foamed material.
9. Applicator roller according to Claim 1 and 7, characterized in that compressible layer (13) of applicator roller (5, 6, 7) comprises air or gas inclusions.
10. Applicator roller according to at least Claim 1, characterized in that applicator roller (5, 6, 7) can be pulled in the form of a casing onto roller core (12) as a sleeve, compressible layer (13) being concentrically arranged on a casing and cover layer (14) being arranged on compressible layer (13).
11. Applicator roller according to at least Claim 1 and 10, characterized in that applicator roller (5, 6, 7) comprises a barrier layer (15) between roller core (12) and compressible layer (13) or between the casing and compressible layer (13).

12. Applicator roller according to at least Claim 1, characterized in that layer (13) is arranged firmly adhered onto roller core (12) by means of a first vulcanization and cover layer (14) is arranged firmly adhered onto layer (13) by means of a second vulcanization.

AbstractABSTRACT

~~The invention pertains to a~~An applicator device for a printing/varnishing unit in a processing machineis provided. The invention is based on the problem of creating anThe applicator device of the type mentioned initially that avoids the occurrence ofhelps preventjolts caused byof a cylinder channel, in particular, and thereby increasingthat further increases the print quality. This is solved in that at least one The applicator roller 5, 6, 7 is associated with a cylinder channel 10 of a printing cylinder 1. The aApplicator roller 5, 6, 7 consists of a roller core 12 on which at least one compressible layer 13 and a cover layer 14 are concentrically arranged.

Figure 1